


Classic Analog Displays

| Function | p/n |
|-------------------|------------|
| Apparent Wind | 215-HL-016 |
| Magnified Wind | 215-HL-017 |
| Compass Pointer | 215-HL-018 |
| 12kt Boat Speed | 215-HL-019 |
| 50kt Wind Speed | 215-HL-022 |
| 200m Depth | 215-HL-025 |
| 100ft/fath Depth | 215-HL-026 |
| 25kt Boat Speed | 215-HL-058 |
| Cross Track Error | 215-HL-119 |
| Compass Card | 215-HL-142 |
| Off Course | 215-HL-151 |
| Rudder Angle | 215-HL-158 |
| Heel Angle | 215-HL-160 |

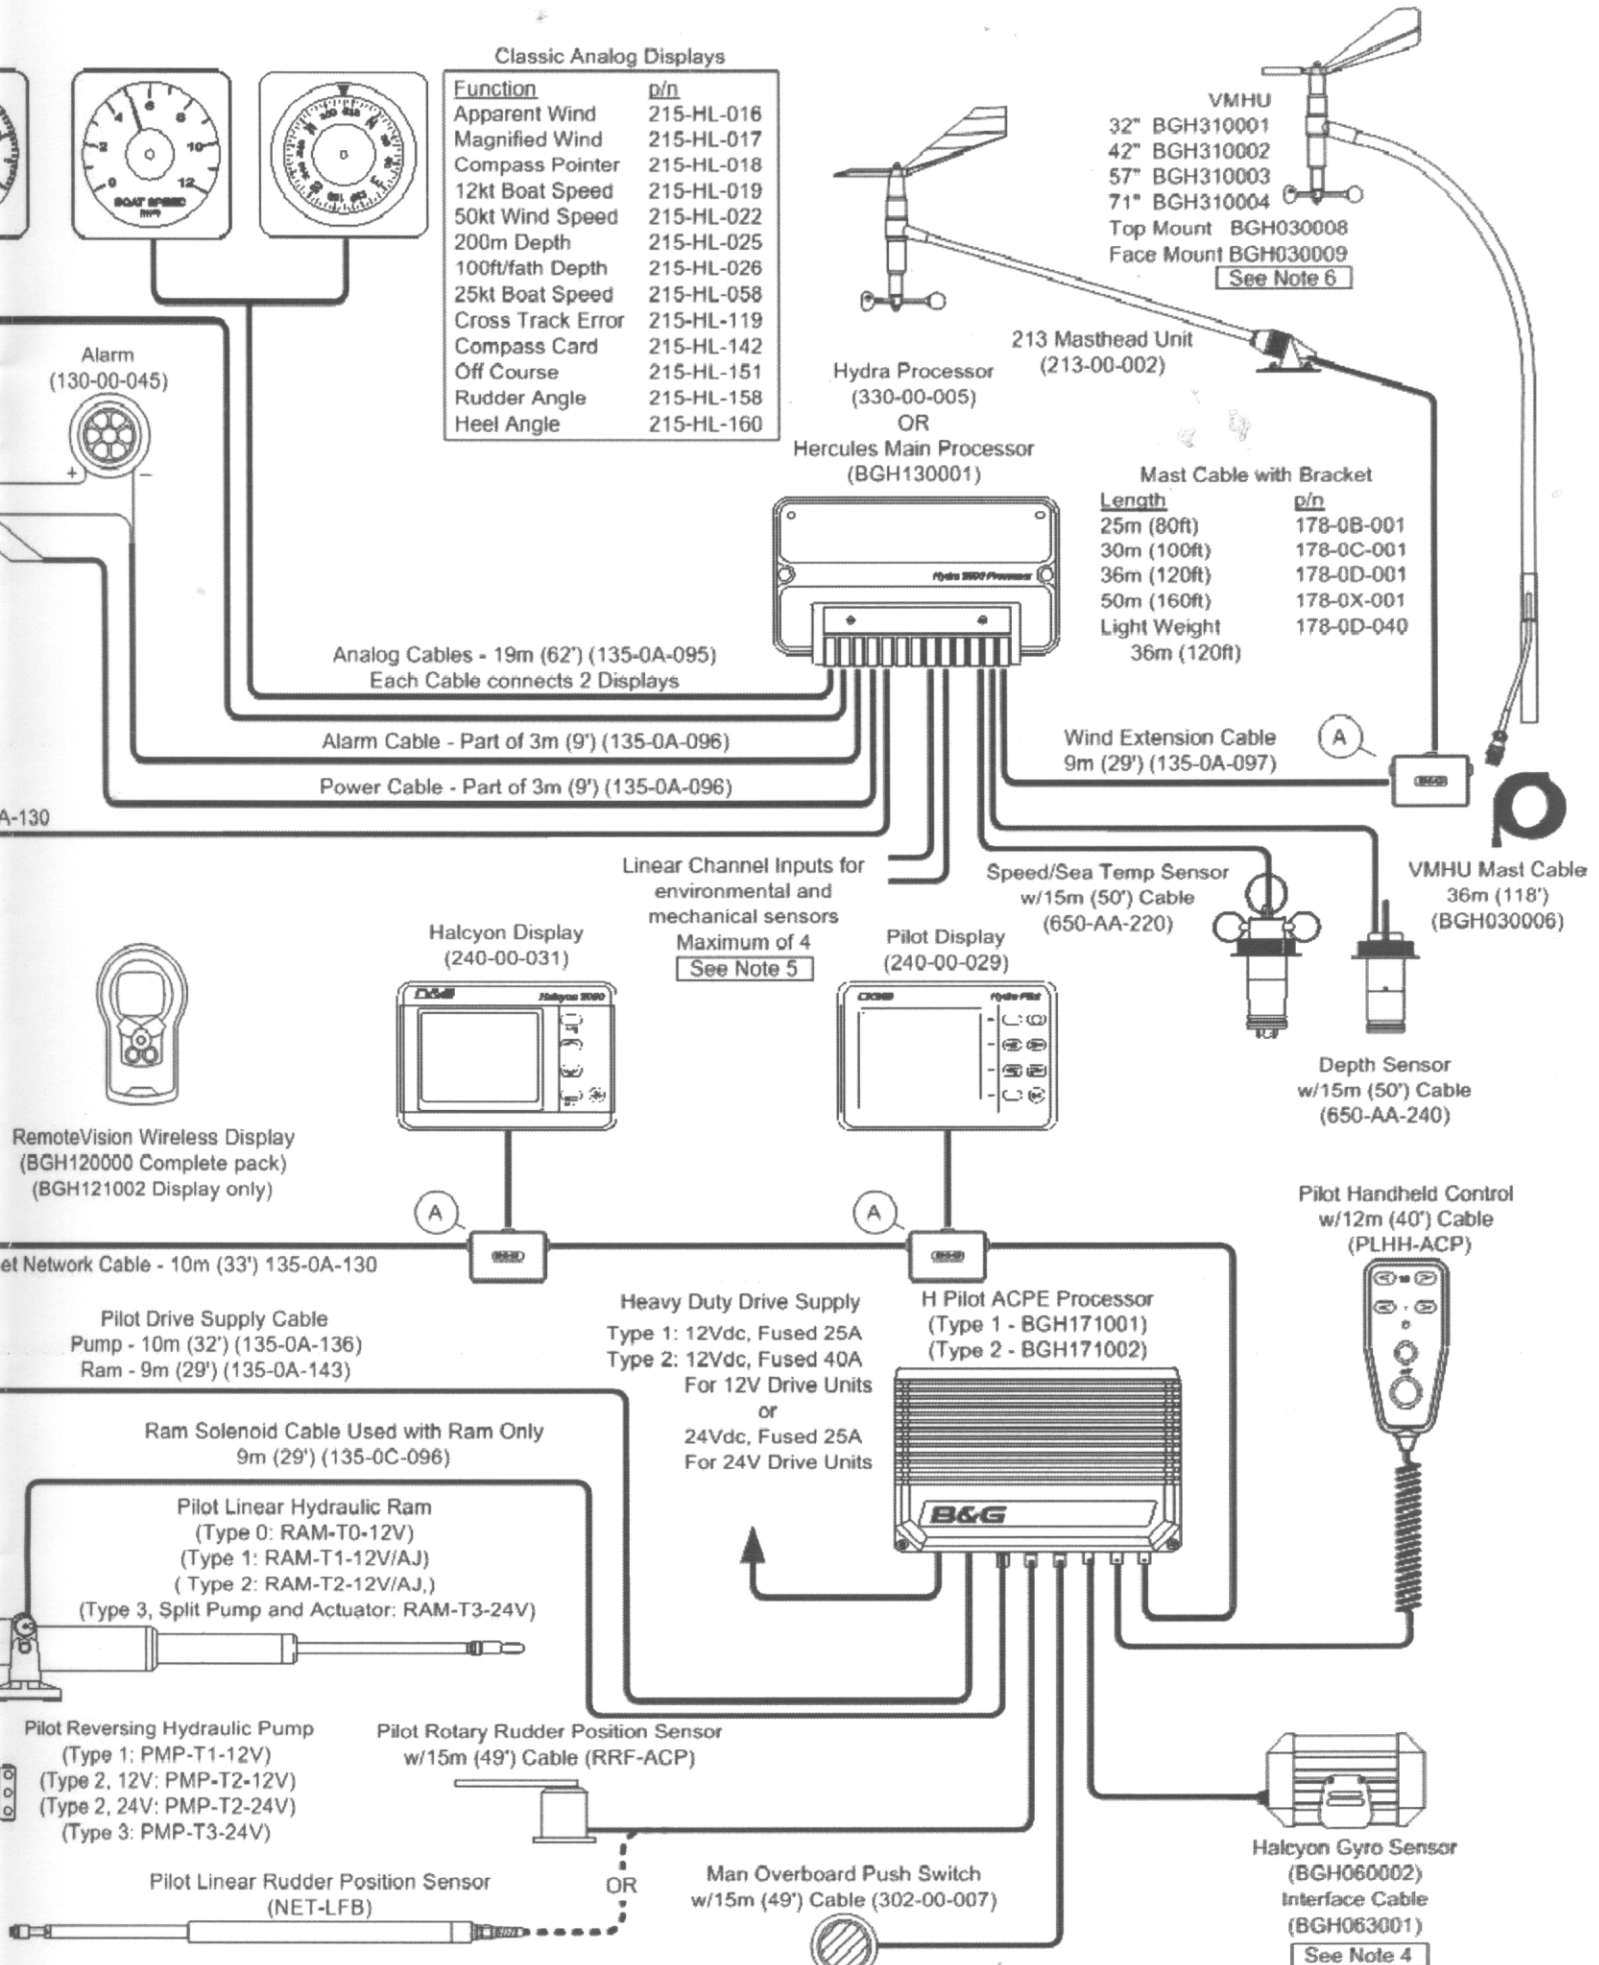

- VMHU
- 32" BGH310001
 - 42" BGH310002
 - 57" BGH310003
 - 71" BGH310004
 - Top Mount BGH030008
 - Face Mount BGH030009
- See Note 6

- Mast Cable with Bracket
- | Length | p/n |
|--------------|------------|
| 25m (80ft) | 178-0B-001 |
| 30m (100ft) | 178-0C-001 |
| 36m (120ft) | 178-0D-001 |
| 50m (160ft) | 178-0X-001 |
| Light Weight | 178-0D-040 |
| 36m (120ft) | |

Wind Extension Cable
9m (29') (135-0A-097)

VMHU Mast Cable
36m (118')
(BGH030006)

Speed/Sea Temp Sensor
w/15m (50') Cable
(650-AA-220)

Depth Sensor
w/15m (50') Cable
(650-AA-240)

Pilot Handheld Control
w/12m (40') Cable
(PLHH-ACP)

H Pilot ACPE Processor
(Type 1 - BGH171001)
(Type 2 - BGH171002)

Heavy Duty Drive Supply
Type 1: 12Vdc, Fused 25A
Type 2: 12Vdc, Fused 40A
For 12V Drive Units
or
24Vdc, Fused 25A
For 24V Drive Units

Halcyon Display
(240-00-031)

Pilot Display
(240-00-029)

Linear Channel Inputs for
environmental and
mechanical sensors
Maximum of 4
See Note 5

Analog Cables - 19m (62') (135-0A-095)
Each Cable connects 2 Displays

Alarm Cable - Part of 3m (9') (135-0A-096)

Power Cable - Part of 3m (9') (135-0A-096)

RemoteVision Wireless Display
(BGH120000 Complete pack)
(BGH121002 Display only)

et Network Cable - 10m (33') 135-0A-130

Pilot Drive Supply Cable
Pump - 10m (32') (135-0A-136)
Ram - 9m (29') (135-0A-143)

Ram Solenoid Cable Used with Ram Only
9m (29') (135-0C-096)

Pilot Linear Hydraulic Ram
(Type 0: RAM-T0-12V)
(Type 1: RAM-T1-12V/AJ)
(Type 2: RAM-T2-12V/AJ)
(Type 3, Split Pump and Actuator: RAM-T3-24V)

Pilot Reversing Hydraulic Pump
(Type 1: PMP-T1-12V)
(Type 2, 12V: PMP-T2-12V)
(Type 2, 24V: PMP-T2-24V)
(Type 3: PMP-T3-24V)

Pilot Rotary Rudder Position Sensor
w/15m (49') Cable (RRF-ACP)

Pilot Linear Rudder Position Sensor
(NET-LFB)

Man Overboard Push Switch
w/15m (49') Cable (302-00-007)

Halcyon Gyro Sensor
(BGH060002)
Interface Cable
(BGH063001)
See Note 4